

Series  
V250



    **IECEX MSHA IP68**

**Engineered for Better Performance.  
Smart Operation. Intrinsically Safe.**



Pulsarlube **V**

### Features & Advantages

#### Safe & Stable Lubrication System

Consistent & reliable lubrication based on the proven technology of inert Nitrogen gas generation through an electrochemical reaction

#### Accuracy

- ▶ Microprocessor controlled to ensure the most accurate dispensing rate
- ▶ More reliable against ambient temperature variations than hydrogen gas type lubricators

#### Intrinsic Safety

Certified CE, ATEX, UL, MSHA for use in hazardous areas

#### User Friendly Application

- ▶ Variable dispensing settings available with the press of a button
- ▶ Easy-to-reprogram & large informative LCD display
- ▶ Transparent container for easy visual inspection of remaining lubricant


### Typical Industries and Applications



- Motors & pumps
- Automotives & electronics
- Paper mills, steel mills, cement plants where water & excessive contaminants exist
- Places where explosion-proof products are required

### Overview

### Product Specifications

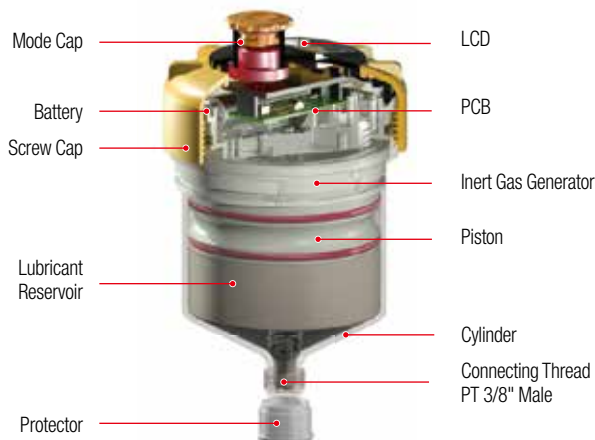

#### Grease Pouch Capacity

250 ml (disposable)

#### Operating Method

Nitrogen(N<sub>2</sub>) gas

#### Operating Pressure

Max. 5bar (73psi)

#### Operating Temperature

-20°C ~ 55°C (-4°F ~ 131°F)

#### Dispensing Periods

1, 2, 3, 6, 12 month & Purge (P)

#### Single Point Remote Installation

Max. 1m (3.3ft) with Ø8 tube

#### Multi-Point Installation

N/A

#### Product Certifications & IP Code

ATEX / UL / IECEX / KCs / CE / MSHA / IP68